

Technical Information

Current revision 1
19/12/2017

derypol

C/ Plató 6, Entlo. 5^o- 08021 Barcelona (Spain)
Tel. (93) 238 90 90 Fax (93) 238 90 91
www.derypol.com

Himoloc GA50

Product for Oil & Gas

DESCRIPTION

Floculant to be used in Oil & Gas where a medium amphoteric charge is needed.

Better dissolution compared to the emulsion and solid products.


The product is free of organic solvents, surfactants and volatile organic compounds (VOCs).

Its main ingredients are: polymer, salts and water.

CHARACTERISTICS

Type of product	: Water dispersion amphoteric polymer
Appearance	: White milky liquid
Ionic character	: Amphoteric
Odor	: Salty odor
Density	: 1.2 g/cm ³
pH	: 5,0 – 6,5
Viscosity	: < 600 cP
Viscosity at 1%	: 15 - 30 cP
Molecular weight	: High
Shelf life	: We recommend not keeping the product for more than 9 months.

Note: The parameters indicated here are not necessarily the specifications of the product. These will be agreed with each customer and will be a part of the contract that must be respected for each batch supplied.

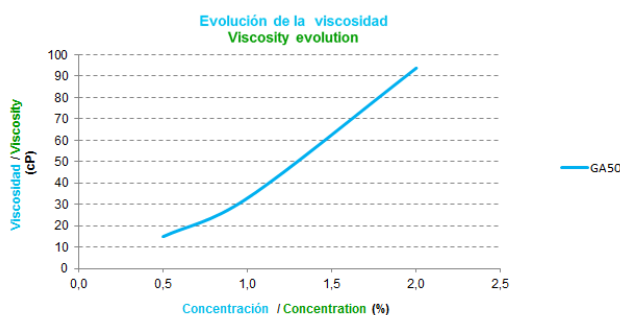

APPLICATION

- It is recommended to dissolve the product in water prior to use. It dissolves easily in any proportion. The only limitation is the viscosity of the solution.
- It can be dosed using a static mixer.
- It is advisable not to exceed concentrations higher than 5%.
- Any water quality can be used for its preparation. Depending on this, the final solution will have a variable stability or variable usage time.
- It can work alone or in combination with other products commonly used in water treatment, such as: aluminum sulphate, aluminum polychloride, ferric chloride, polyamine, lime, etc.
- In order to achieve maximum performance of the product, it is necessary to choose the most appropriate dosage and the dosage point.
- It is important to avoid the entry of water into the product circuit, so it is recommended to use non-return valves. If this were to happen, gels could be formed and could block the pipes.

Consult with our technical staff in case of doubt.

BENEFITS

- Provides excellent cuttings encapsulation.
- Provides improved shale stabilization.
- Enhances the removal of drill solids.
- Liquid product for easy mixing and rapid yield.
- Can be used to viscosify Clearwater and low-solids drilling fluids.
- High temperature resistant (< 200 °C).
- Salty media affinity.
- Effective in a wide range of pH.
- It also acts as a viscosifier, friction reducer and flocculant while providing some fluid-loss control. It can be used in mud systems ranging from low-solids to weighted, using seawater or fresh water.
- It does not cause the emission of Volatile Organic Compounds (VOCs).

STORAGE AND DISTRIBUTION

- The product should be kept in a covered place, the container tightly closed, protected from sunlight and within the temperature range recommended in Section 7 of the Safety Data Sheet.
- Once the container is open, avoid contamination with any other water based product and/or with strong bases. Check the Material Safety Data Sheet.
- For bulk product avoid metal tanks. Plastic materials are recommended (polypropylene, polyethylene...).
- There is a great variety of containers. Check with our Customer Service in order to choose the most convenient one.

REGULATORY

Consult our technical staff in case of doubt.