

Technical Information

Current revision 12
06/04/2021

derypol

C/ Plató 6, Entlo. 5^a- 08021 Barcelona (Spain)
Tel. (93) 238 90 90 Fax (93) 238 90 91
www.derypol.com

Himoloc GO2030

Product for water treatments

DESCRIPTION

Water treatment flocculant where a medium anionic charge is needed.

Better dissolution compared to the emulsion and solid products.

The product is free of organic solvents, surfactants and volatile organic compounds (VOCs).


Its main ingredients are: polymer, salts and water.

CHARACTERISTICS

Type of product	: Water dispersion anionic polymer
Appearance	: White milky liquid
Ionic character	: Medium Anionic
Odor	: Salty odor
Density	: 1.2 g/cm ³
pH	: 3 – 5
Residual Acrylamide	: ≤ 250 ppm
Viscosity	: < 2000 cP
Molecular weight	: Very high
Shelf life	: We recommend not keeping the product for more than 9 months.

Note: The parameters indicated here are not necessarily the specifications of the product. These will be agreed with each customer and will be a part of the contract that must be respected for each batch supplied.

** In case you think of checking the quality of this product, we strongly recommend to do it within the 15 days period after receipt. At the same time, we recommend the product to be stored in those good conditions as indicated in section 7 of the MSDS. In doing it this way, we will avoid any possible deviation owing to inadequate storage conditions. Another option you may consider is sampling the batch-product as it arrives to your facilities. That sample will be easily kept in good conditions and may be analyzed as convenient.*

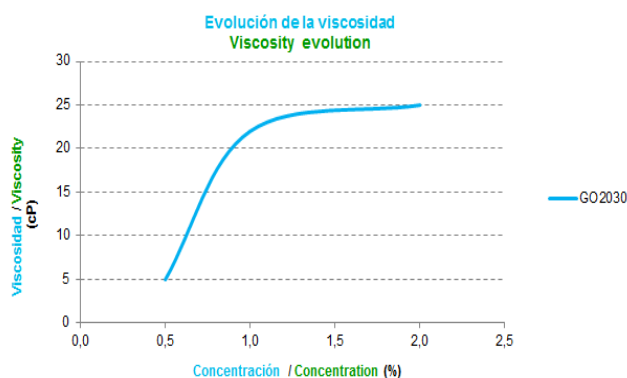

APPLICATION

- It is recommended to dissolve the product in water prior to use. It dissolves easily in any proportion. The only limitation is the viscosity of the solution.
- It can be dosed using a static mixer.
- It is advisable not to exceed concentrations higher than 5%.
- Any water quality can be used for its preparation. Depending on this, the final solution will have a variable stability or variable usage time.
- It can work alone or in combination with other products commonly used in water treatment, such as: aluminum sulphate, aluminum polychloride, ferric chloride, polyamine, lime, etc.
- In order to achieve maximum performance of the product, it is necessary to choose the most appropriate dosage and the dosage point.
- It is important to avoid the entry of water into the product circuit, so it is recommended to use non-return valves. If this were to happen, gels could be formed and could block the pipes.

Consult with our technical staff in case of doubt.

BENEFITS

The following treatments are recommended:

- Industrial Water Flocculant (decantation or flotation).
- Mining: Separation of minerals.
- Effective in a wide range of pH (5-14).
- Sludge treatment (dehydration in belt and press filters, centrifuge, press screws, etc ...)
- It does not cause the emission of Volatile Organic Compounds (VOCs).

STORAGE AND DISTRIBUTION

- The product should be kept in a covered place, the container tightly closed, protected from sunlight and within the temperature range recommended in Section 7 of the Safety Data Sheet.
- Once the container is open, avoid contamination with any other water based product and/or with strong bases. Check the Material Safety Data Sheet.
- Take the habitual precautions when handling a chemical product. Avoid the product to contact with eyes, skin or clothes.
- There is a great variety of containers. Check with our Customer Service in order to choose the most convenient one.

REGULATORY

Consult our technical staff in case of doubt.