

Technical Information

Current revision 1
13/06/2018

derypol

C/ Plató 6, Entlo. 5^o- 08021 Barcelona (Spain)
Tel. (93) 238 90 90 Fax (93) 238 90 91
www.derypol.com

Himoloc TG823 GR

Product for water treatments

DESCRIPTION

Concentrated flocculant to be used in water treatment coming from the food industry where a medium cationic charge is needed and also where the solid phase can be used for animal feed.

Better dissolution compared to the emulsion and solid products.


The product is free of organic solvents, surfactants and volatile organic compounds (VOCs).

Its main ingredients are: polymer, salts and water.

CHARACTERISTICS

Type of product	: Water dispersion cationic polymer
Appearance	: White milky liquid
Ionic character	: Cationic
Odor	: Salty odor
Density	: 1.2 g/cm ³
pH	: 3 - 5
Viscosity	: ≤ 2500 cP
Remmant	: < 10 ppm Acrylamide
Molecular weight	: Very high
Shelf life	: We recommend not keeping the product for more than 9 months.

Note: The parameters indicated here are not necessarily the specifications of the product. These will be agreed with each customer and will be a part of the contract that must be respected for each batch supplied.

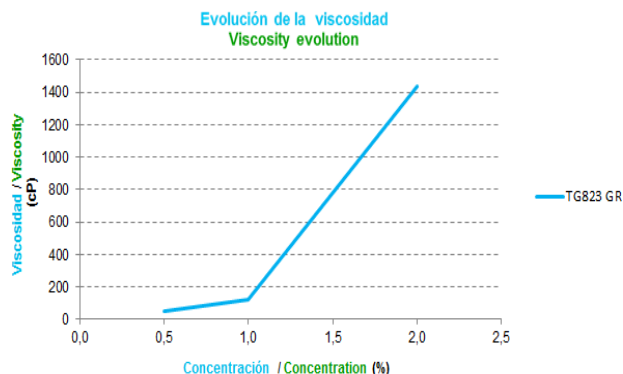

APPLICATION

- It is recommended to dissolve the product in water prior to use. It dissolves easily in any proportion. The only limitation is the viscosity of the solution.
- Any water quality can be used for its preparation. Depending on this, the final solution will have a variable stability or variable usage time.
- It can be dosed using a static mixer, It is advisable not to exceed concentrations higher than 5%.
- It can work alone or in combination with other products commonly used in water treatment, such as: aluminum sulphate, aluminum polychloride, ferric chloride, polyamine, lime, etc.
- In order to achieve maximum performance of the product, it is necessary to choose the most appropriate dosage and the dosage point, It is important to avoid the entry of water into the product circuit, so it is recommended to use non-return valves. If this were to happen, gels could be formed and could block the pipes.

Consult with our technical staff in case of doubt.

BENEFITS

The following treatments are recommended:

- Flocculant to be used in the treatment of water coming from the food industry where the solid phase can be used for animal feed.
- Because of its high molecular weight this product is specially recommended for phase separation by using high speed centrifuges, and for those cases when sludge has a relatively low water content.
- It does not cause the emission of Volatile Organic Compounds (VOCs).
- Water treatment: separation of oils and grease by flotation.
- High conductivity media.

STORAGE AND DISTRIBUTION

- The product should be kept in a covered place, the container tightly closed, protected from sunlight and within the temperature range recommended in Section 7 of the Safety Data Sheet.
- Once the container is open, avoid contamination with any other water based product and/or with strong bases. Check the Material Safety Data Sheet.
- For bulk product avoid metal tanks. Plastic materials are recommended (polypropylene, polyethylene...).
- There is a great variety of containers. Check with our Customer Service in order to choose the most convenient one.

REGULATORY

GRAS certification available.

Consult our technical staff in case of doubt.